



**Submersible Drainage
Sewage Pumps (50Hz)**

XDE/XVE/SAE/HME/SCE/SDE/SVE/SVNE/GDE series



General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Emptying of septic tanks and residential sumps.
	Fluid Temperature	0 to 50°C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase)
	Impeller	Open Impeller
	Shaft Seal/Material	Double seals
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	AISI 304+Nylon
Motor Cover	AISI 304
Motor Casing	AISI 304
Fixing Ring	AISI 304
Pump Body	AISI 304
Mechanical seal	Sic/Sic/NBR
Impeller	AISI 304
Key	AISI 304
Pump Casing	AISI 304
Oil Seal	NBR
Shaft	AISI 304
V-type Axial Oil Seal	NBR
Suction flange	AISI 304

Characteristic curves N= 2900 rpm

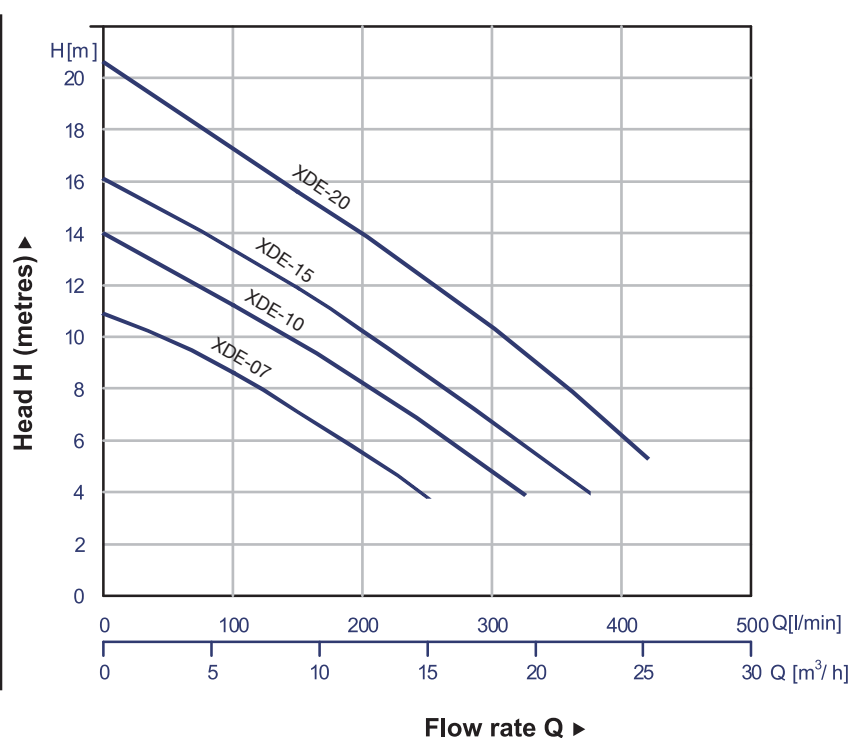


Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase (Voltage)	Standard		Max		Solid Passage mm	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM		
XDE-07	0.75(0.55)	RP 1 1/2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	8.6	100	10.9	250	8	10
XDE-10	1.0(0.75)	RP 1 1/2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	11.2	100	14	325	8	10
XDE-15	1.5(1.1)	RP 1 1/2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	11.9	150	16.1	375	8	10
XDE-20	2.0(1.5)	RP 1 1/2"	3φ 220V-240V / 380V-415V	15.6	150	20.6	420	8	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

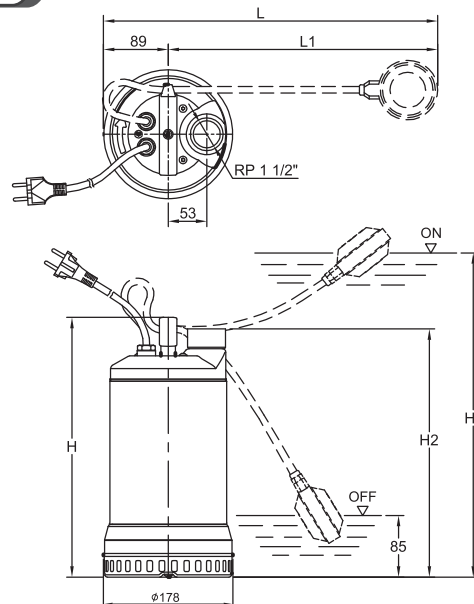

SINGLE PHASE

Model	Dimension (mm)					
	H	H1	H2	L	L1	N.W. kg
XDE-07	357	437	341	459	370	12
XDE-10	407	497	391	514	425	15
XDE-15	407	497	391	514	425	17

THREE-PHASE

Model	Dimension (mm)		
	H	H2	N.W. kg
XDE-07	357	341	12
XDE-10	357	341	12
XDE-15	407	391	15
XDE-20	407	391	17

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Emptying of septic tanks and residential sumps.
	Fluid Temperature	0 to 35°C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double seals
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	AISI 304+Nylon
Motor Cover	AISI 304
Motor Casing	AISI 304
Fixing Ring	AISI 304
Pump Body	AISI 304
Mechanical seal	Sic/Sic/NBR
Impeller	AISI 304
Key	AISI 304
Pump Casing	AISI 304
Oil Seal	NBR
Shaft	AISI 304
V-type Axial Oil Seal	NBR
Suction flange	AISI 304

Characteristic curves N= 2900 rpm

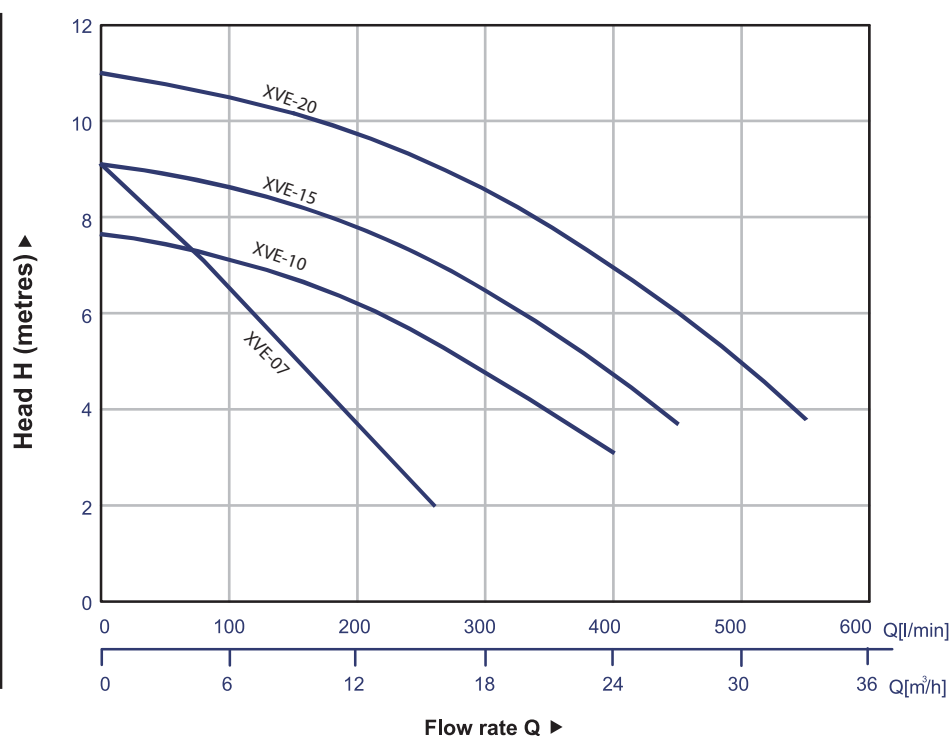


Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase (Voltage)	Standard		Max		Solid Passage mm	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM		
XVE-07	0.75(0.55)	RP 1 1/2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	7.1	80	9.1	260	35	5
XVE-10	1.0(0.75)	RP 2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	7.1	100	7.7	400	50	10
XVE-15	1.5(1.1)	RP 2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	8.6	100	9.1	450	50	10
XVE-20	2.0(1.5)	RP 2"	3φ 220V-240V / 380V-415V	10.2	150	11	550	50	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

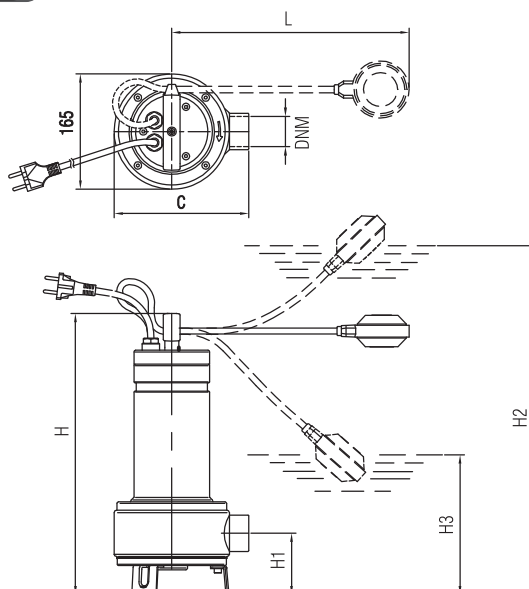

SINGLE-PHASE

Model	Dimension (mm)							
	H	H1	H2	H3	L	C	DNM	N.W. kg
XVE-07	403	88	483	185	350	193	RP1 1/2"	11
XVE-10	486	111.5	566	268	350	198	RP 2"	14
XVE-15	486	111.5	566	268	350	198	RP 2"	15

THREE-PHASE

Model	Dimension (mm)				
	H	H1	C	DNM	N.W. kg
XVE-07	403	88	193	RP1 1/2"	11
XVE-10	436	111.5	198	RP 2"	12
XVE-15	486	111.5	198	RP 2"	14
XVE-20	486	111.5	198	RP 2"	15

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS 41
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL 200
Agitator	AISI 316
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	AISI 410
Motor Housing	AISI 304

Characteristic curves N=2900 rpm

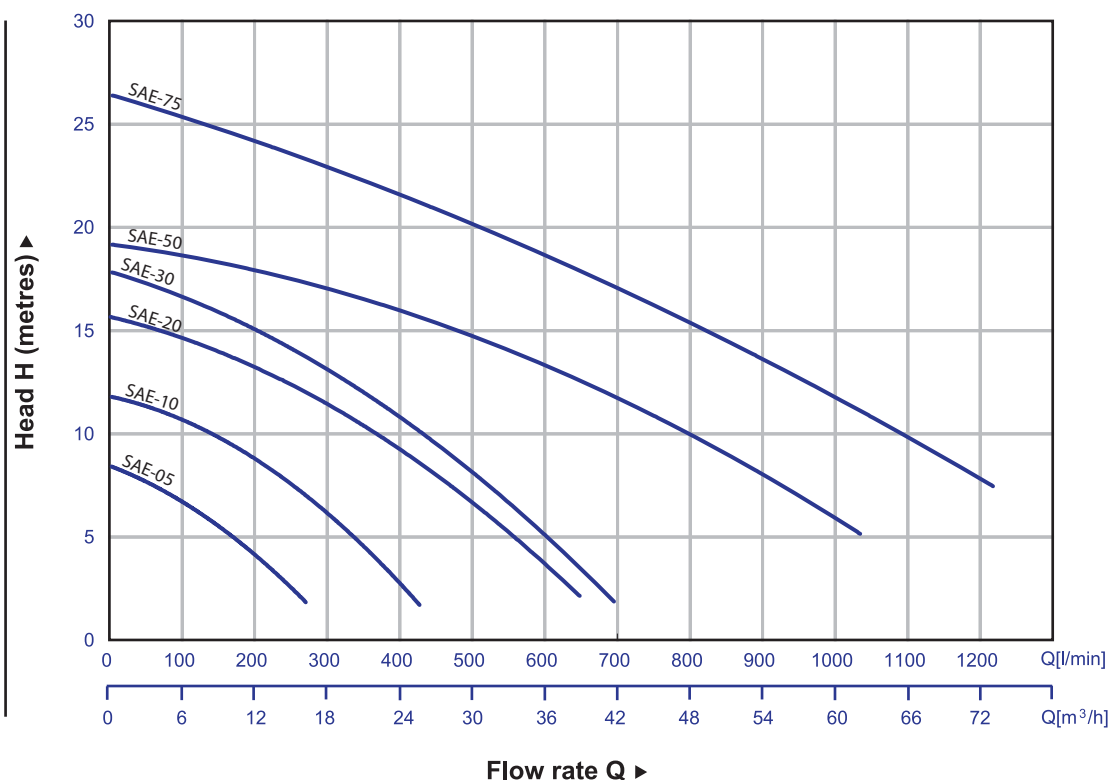

Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SAE-05-50	1/2 (0.37)	2"	1φ/3φ	6	130	8	300	20	13.5	10
SAE-10-50	1 (0.75)	2"	1φ/3φ	8	180	12	400	20	18.5	10
SAE-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	350	16	650	20	34	10
SAE-30-50(80)	3 (2.2)	2"/3"	3φ	11	400	18	700	20	35	10
SAE-50-80(100)	5 (3.7)	3"/4"	3φ	15	500	19	1000	35	57	10
SAE-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	600	27	1100	35	63	10

SAE-05-50: Threaded Flange Type


SAE-10-50: Threaded Flange Type or Elbow Type

SAE-20-50(80) ~ SAE-30-50(80): Elbow Type (2" or 3")

SAE-50-80(100) ~ SAE-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

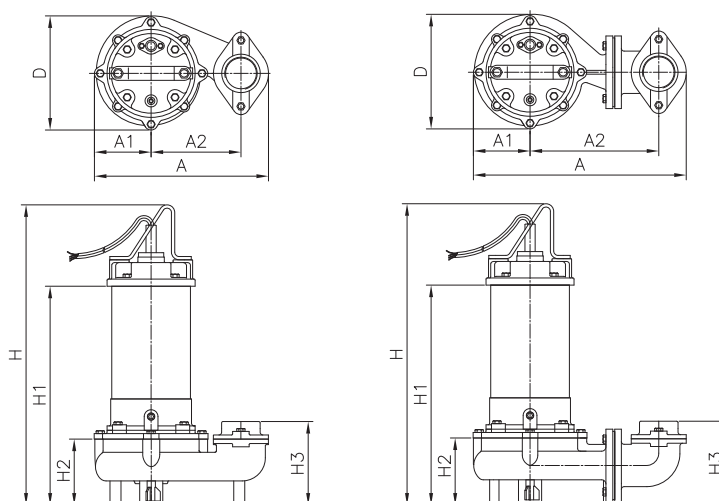

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SAE-05-50	222	73	115	145	410	297	113	133
SAE-10-50	222	73	115	149	464	340	113	133
SAE-20-50(80)	387	103	234	208	548	400	122	153
SAE-30-50(80)	387	103	234	208	568	420	122	153
SAE-50-80(100)	459	110	256	227	638	471	160	220
SAE-75-80(100)	459	110	256	227	678	511	160	220

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon 6
Motor Cover	ADC 12
End Bracket	SECC
Pump Casing	Cast Iron GJL 200
Impeller	TPU
Strainer	PVC
Agitator	SMF 5030
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Shaft	AISI 410
Motor Housing	ADC 12

Characteristic curves N=2900 rpm

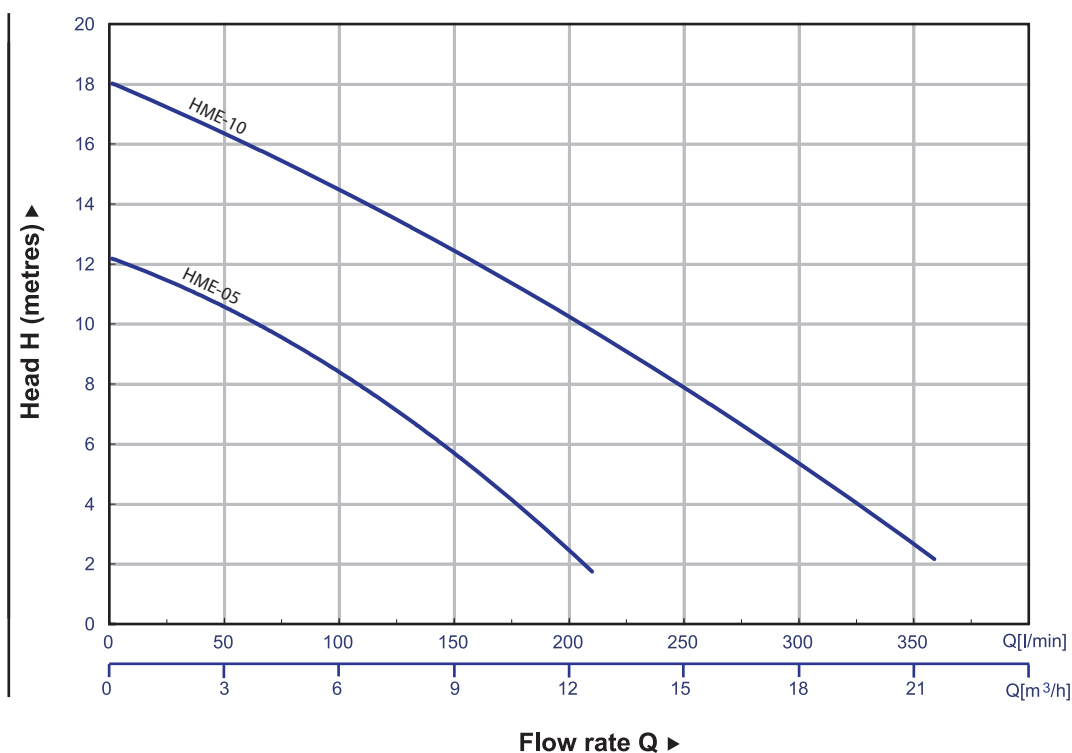


Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
HME 05-50	1/2 (0.37)	2"	1φ/3φ	7	120	12	240	10	12.5	10
HME 10-50(80)	1 (0.75)	2"/3"	1φ/3φ	10	200	18	350	10	15.5	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

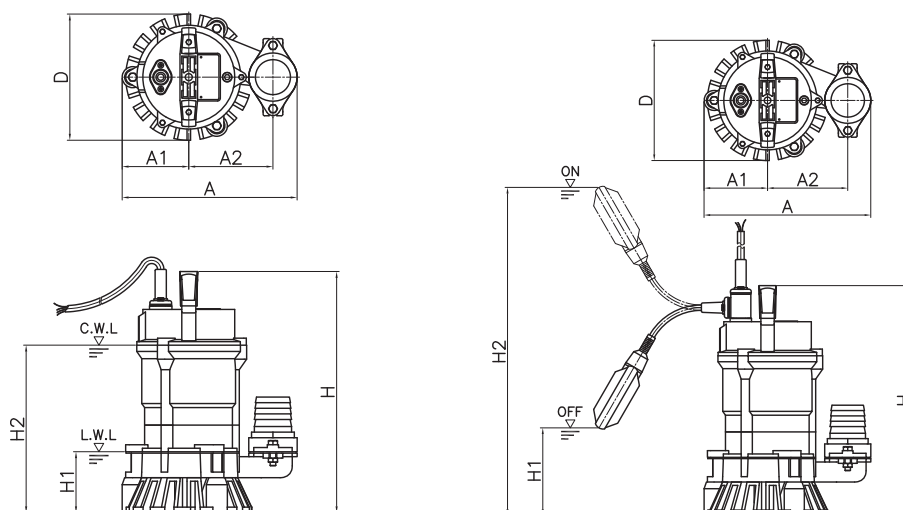

Model	Dimension (mm)						
	A	A1	A2	D	H	H1	H2
HME-05-50	250	95	120	180	344	87	239
HME-05MA-50	250	95	120	180	344	131	491
HME-10-50(80)	280	95	135	180	369	87	264
HME-10MA-50(80)	280	95	135	180	369	156	516

A= Auto Float Switch

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Rain and spring water drainage for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
	Impeller	Effluent Impeller
	Shaft Seal/Material	Double Mechanical Seal and one Oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS 41
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL 200
Strainer	AISI 304
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	AISI 410
Motor Housing	AISI 304

Characteristic curves N=2900 rpm

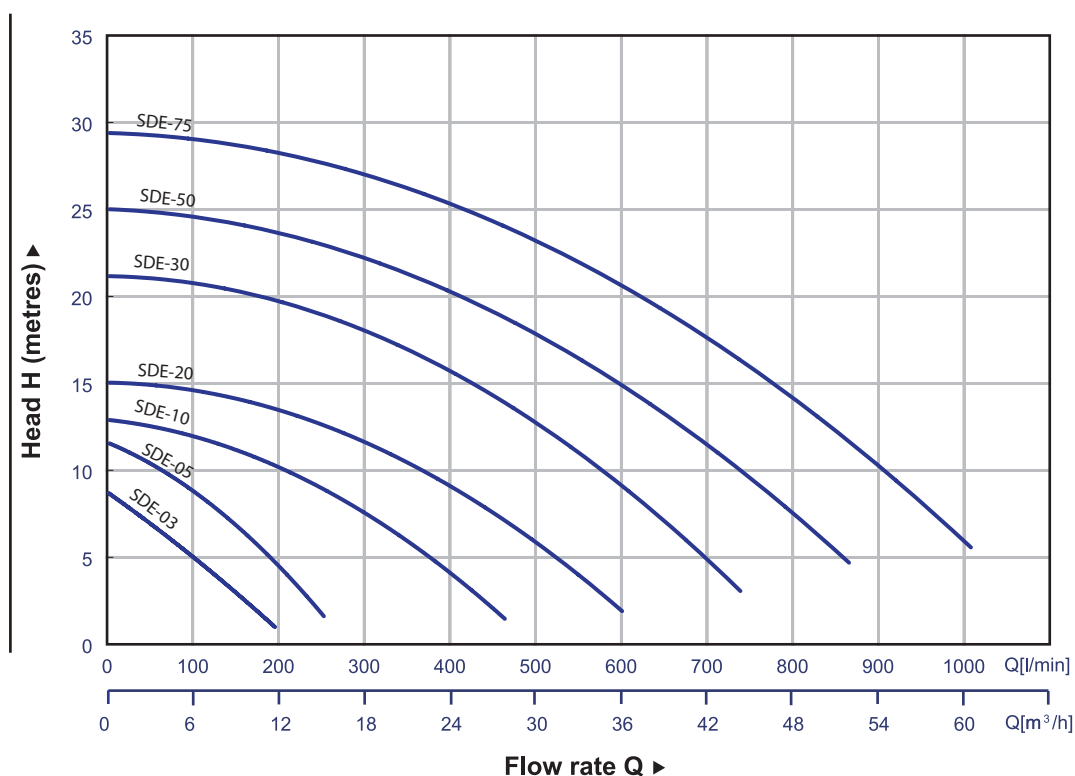

Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SDE-03-50	1 / 3 (0.25)	2"	1φ/3φ	5	80	9	210	6	12.5	10
SDE-05-50	1 / 2 (0.37)	2"	1φ/3φ	6	200	11	300	6	13.5	10
SDE-10-50	1 (0.75)	2"	1φ/3φ	8	220	13	490	6	23.5	10
SDE-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	12	400	15	600	6	34	10
SDE-30-50(80)	3 (2.2)	2"/3"	3φ	15	400	21	800	6	35	10
SDE-50-80(100)	5 (3.7)	3"/4"	3φ	19	500	25	900	6	57	10
SDE-75-80(100)	7.5 (5.5)	3"/4"	3φ	25	600	29	1100	6	63	10

SDE-03-50 ~ SDE-05-50: Thread Type


SDE-10-50: Elbow Type (2")

SDE-20-50(80): Elbow Type (2" or 3")

SDE-50-80(100) ~ SDE-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

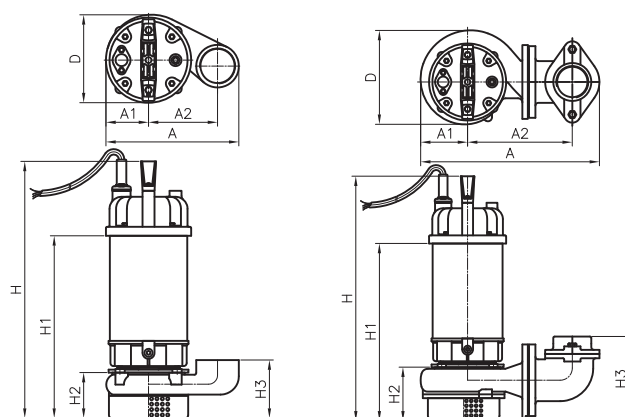

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SDE-03-50	221	71	115	141	348	235	76	97
SDE-05-50	221	71	115	141	373	260	76	97
SDE-10-50	330	86	193	173	451	327	99	155
SDE-20-50(80)	403	103	250	212	536	388	110	164
SDE-30-50(80)	403	103	250	212	556	408	110	164
SDE-50-80(100)	463	110	260	227	605	440	132	215
SDE-75-80(100)	463	110	260	227	645	480	132	215

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water and Sewage for domestic purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one Oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS 41
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL 200
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	AISI 410
Motor Housing	AISI 304

Characteristic curves N=2900 rpm

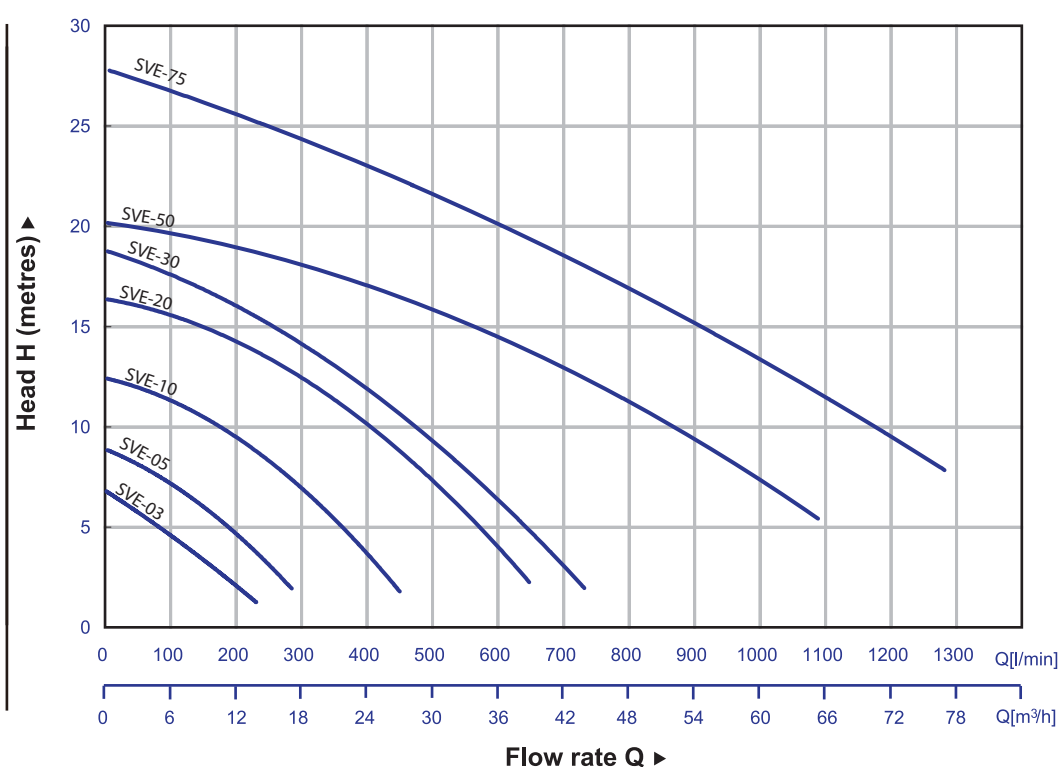

Specifications/Dimensions And Weights


Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SVE-03-50	1/3 (0.25)	2"	1φ/3φ	4	120	7	220	35	12.5	10
SVE-05-50	1/2 (0.37)	2"	1φ/3φ	6	150	9	300	35	13.5	10
SVE-10-50	1 (0.75)	2"	1φ/3φ	8	200	12	450	35	18.5	10
SVE-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	400	17	650	35	34	10
SVE-30-50(80)	3 (2.2)	2"/3"	3φ	11	450	19	750	35	35	10
SVE-50-80(100)	5 (3.7)	3"/4"	3φ	15	550	20	1100	50	57	10
SVE-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	650	28	1200	50	63	10

SVE-03-50 ~ SVE-05-05: Threaded Flange Type
SVE-10-50: Threaded Flange Type or Elbow Type (2")

SVE-20-50(80) ~ SVE-30-50(80): Elbow Type (2" or 3")
SVE-50-80(100) ~ SVE-75-80(100): Elbow Type (3" or 4")
Auto Float Switches are available in Single-phase

Dimensions and Weights

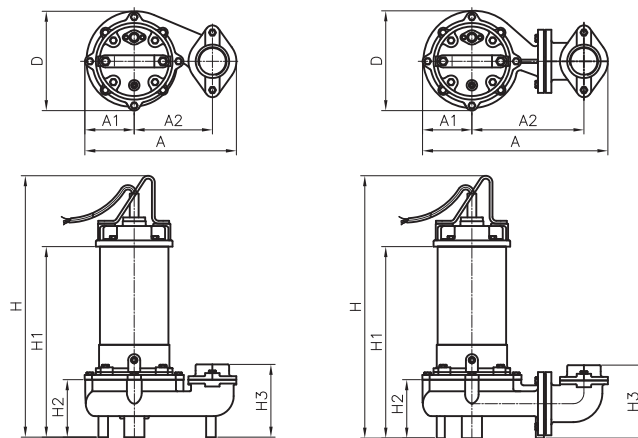

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SVE-03-50	222	73	115	145	385	272	113	133
SVE-05-50	222	73	115	145	410	297	113	133
SVE-10-50	222	73	115	149	464	340	113	133
SVE-20-50(80)	387	103	234	208	548	400	122	153
SVE-30-50(80)	387	103	234	208	568	420	122	153
SVE-50-80(100)	459	110	256	227	638	471	160	220
SVE-75-80(100)	459	110	256	227	678	511	160	220

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water and Sewage for domestic and industrial purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	AISI 304
Motor Cover	AISI 316
Seal Housing	AISI 316
Bracket	Cast Iron GJL 200
Oil Chamber	AISI 316
Pump Housing	AISI 316
Impeller	AISI 316
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	VITON
Shaft	AISI 316
Motor Housing	AISI 316

Characteristic curves N=2900 rpm

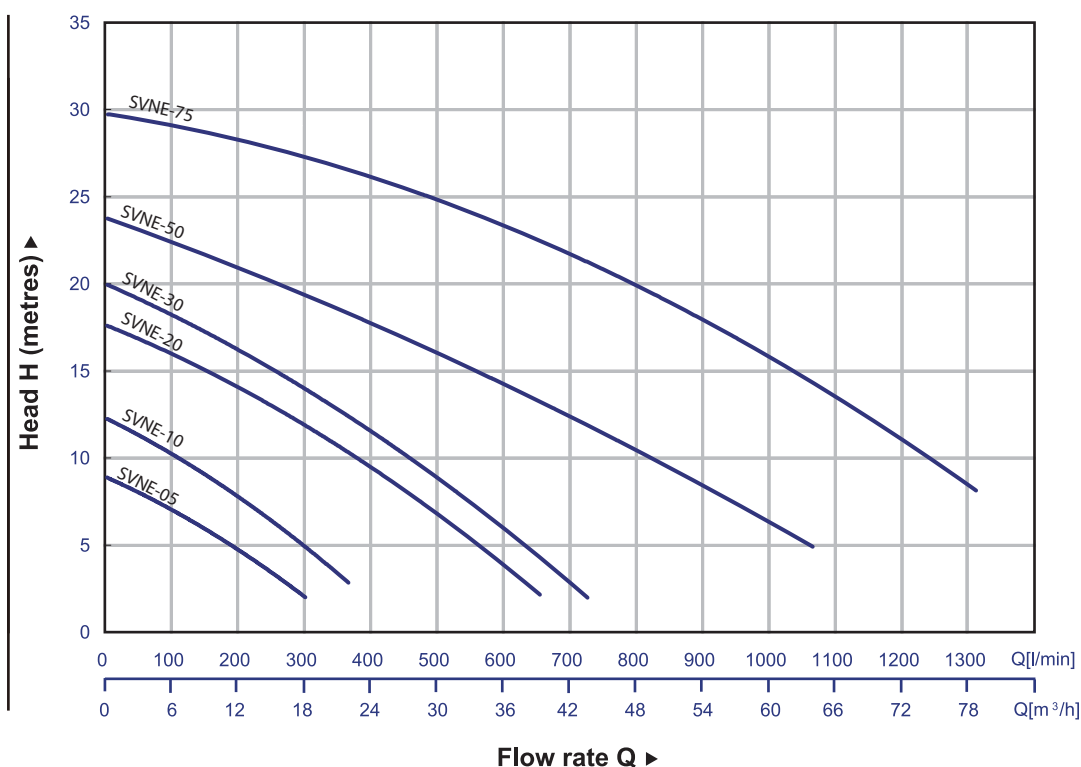

Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SVNE-05-50	1/2 (0.37)	2"	1φ/3φ	6	150	9	300	35	13.5	10
SVNE-10-50	1 (0.75)	2"	1φ/3φ	8	200	13	400	35	18.5	10
SVNE -20-50(80)	2 (1.5)	2"/3"	1φ/3φ	12	400	18	700	35	34	10
SVNE-30-50(80)	3 (2.2)	2"/3"	3φ	13	450	20	750	35	35	10
SVNE-50-80(100)	5 (3.7)	3"/4"	3φ	15	550	24	1100	50	57	10
SVNE-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	700	30	1300	50	63	10

SVNE-05-50: Thread Type


SVNE-10-50: Thread Type or Elbow Type (2")

SVNE-20-50(80) ~ SVNE-30-50(80): Elbow Type (2" or 3")

SVNE-50-80(100) ~ SVNE-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

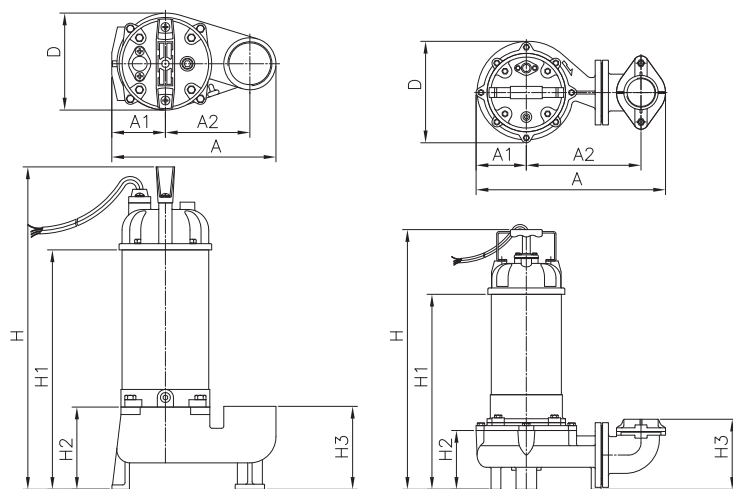

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SVNE-05-50	224	73	115	132	409	296	112	113
SVNE-10-50	224	73	115	132	439	326	112	113
SVNE -20-50(80)	387	103	234	205	530	398	120	143
SVNE-30-50(80)	387	103	234	205	550	418	120	143
SVNE-50-80(100)	459	110	256	230	641	471	160	220
SVNE-75-80(100)	459	110	256	230	681	511	160	220

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector
Pump	Impeller	Semi-Open Impeller with Tungstein Carbide Edge
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS 41
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 201
Bracket	Cast Iron GJL 202
Oil Chamber	Cast Iron GJL 203
Pump Casing	Cast Iron GJL 204
Impeller	Cast Iron GJS 450
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Cutter edge	Tungsten
Shaft	AISI 410
Motor Housing	AISI 304

Characteristic curves N=2900 rpm

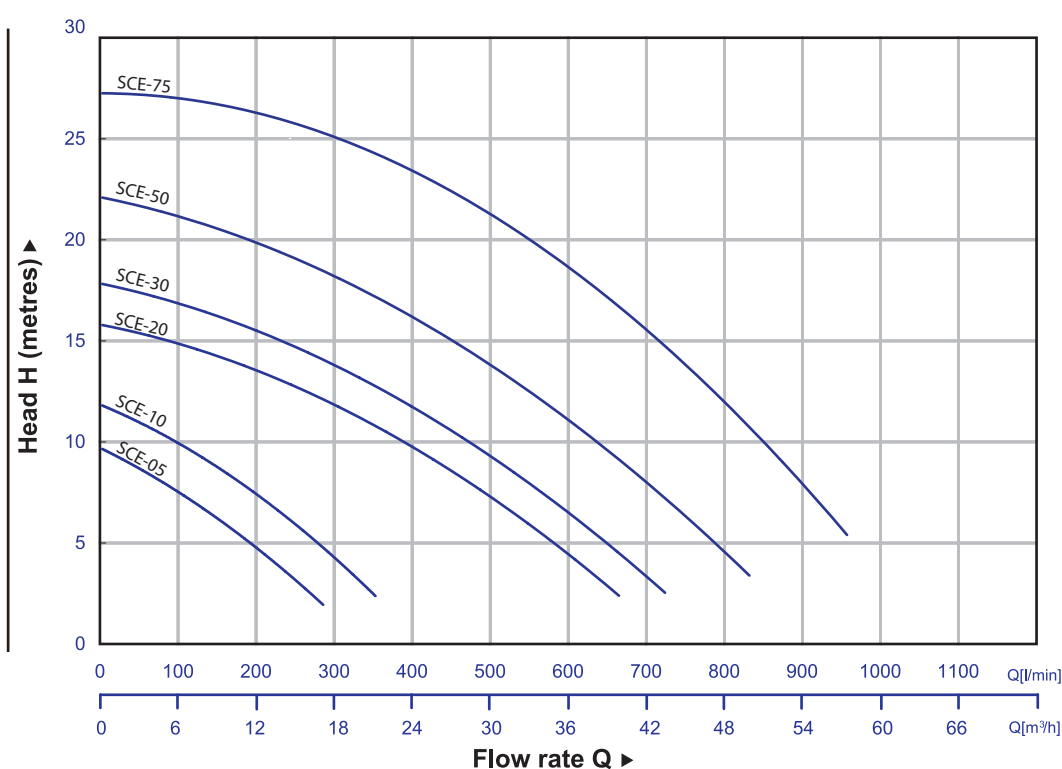

Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SCE-05-50	1/2 (0.37)	2"	1φ/3φ	6	150	8	300	22	13.5	10
SCE-10-50	1 (0.75)	2"	1φ/3φ	9	210	12	400	22	18.5	10
SCE-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	400	16	700	22	34	10
SCE-30-50(80)	3 (2.2)	2"/3"	3φ	13	550	18	750	22	35	10
SCE-50-80(100)	5 (3.7)	3"/4"	3φ	18	600	22	900	28	57	10
SCE-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	650	28	1000	28	63	10

SCE-05-50: Threaded Flange Type


SCE-10-50: Threaded Flange Type or Elbow Type

SCE-20-50(80) ~ SCE-30-50(80): Elbow Type (2" or 3")

SCE-50-80(100) ~ SCE-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

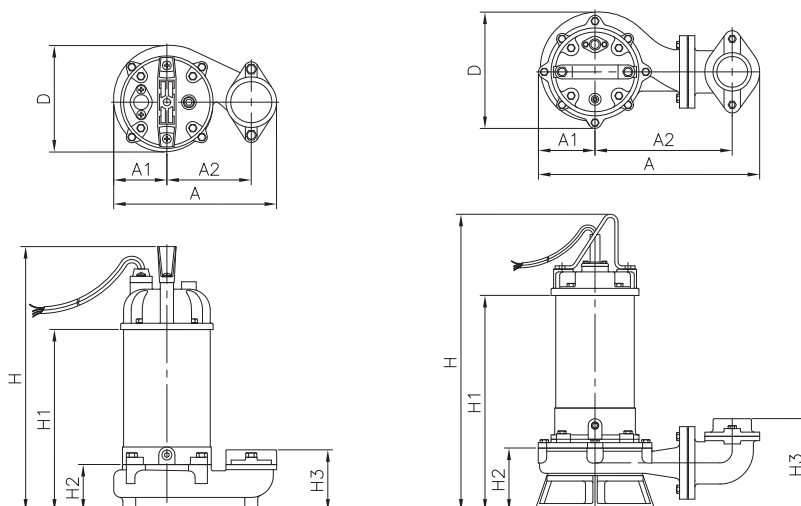

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
<u>SCE-05-50</u>	222	73	115	145	361	248	64	84
<u>SCE-10-50</u>	222	73	115	149	416	292	64	84
<u>SCE-20-50(80)</u>	403	103	250	212	541	393	115	169
<u>SCE-30-50(80)</u>	403	103	250	212	561	413	115	169
<u>SCE-50-80(100)</u>	463	110	260	227	610	445	137	220
<u>SCE-75-80(100)</u>	463	110	260	227	650	485	137	220

General Data/Material/Performance Curve


General Data/Material



Operating Conditions	Applications	Waste water and Sewage for domestic civil and industrial purpose
	Fluid Temperature	0 to 40°C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Overload Protector Seal Minder (Optional)
Pump	Impeller	Vortex
	Shaft Seal/Material	Double Mechanical Seal
	Bearing	Ball Bearing

Component	Material
Cable	H07RN-F
Handle	AISI 304
Motor Cover	FC-20
Motor Frame	AISI 304
Bearing Bracket	FC-20
Pump Casing	FC-20
Impeller	FCD-45
Mechanical seal	SIC/NBR
Oil Seal	NBR
Shaft	AISI 410
SCREWS For BASE STAND	AISI 304
O-RING For BASE STAND	NBR

Characteristic curves N= 2900 rpm

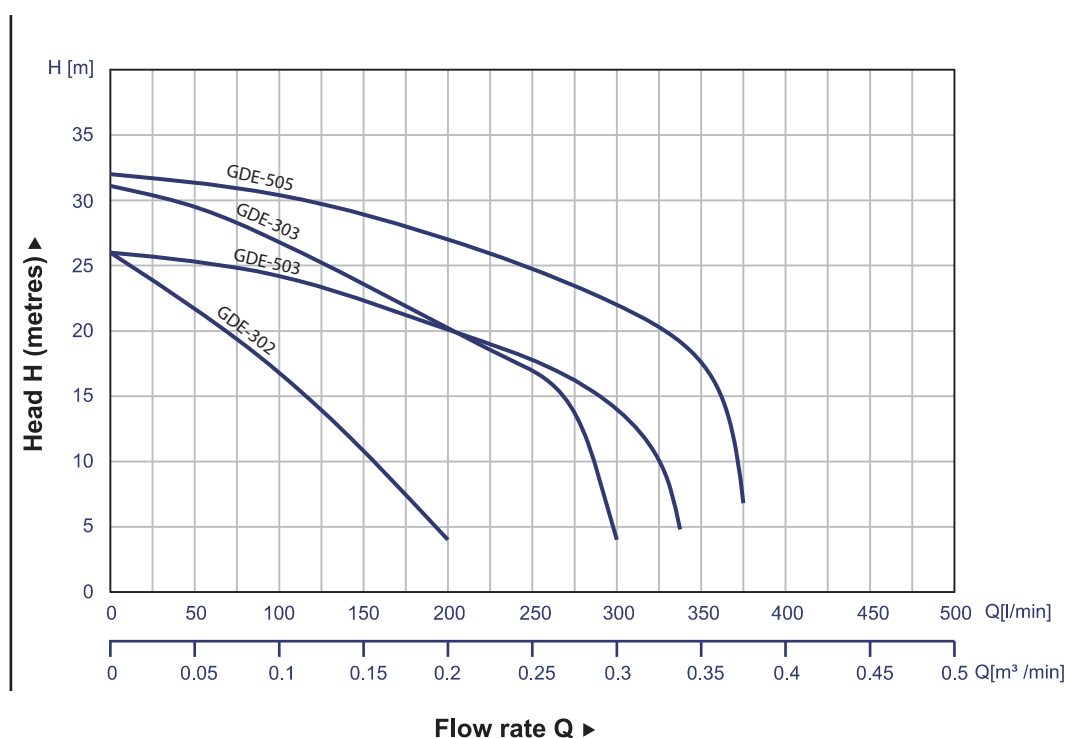


Specifications/Dimensions And Weights

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM		
GDE-302	2 (1.5)	RP 1 1/4"	1 ϕ /3 ϕ	21	60	26	200	36/33	10
GDE-303	3 (2.2)	RP 1 1/4"	3 ϕ	29	60	31	300	37	10
GDE-503	3 (2.2)	RP 2"	3 ϕ	20	200	26	340	38	10
GDE-505	5 (3.7)	RP 2"	3 ϕ	27	200	32	350	52	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

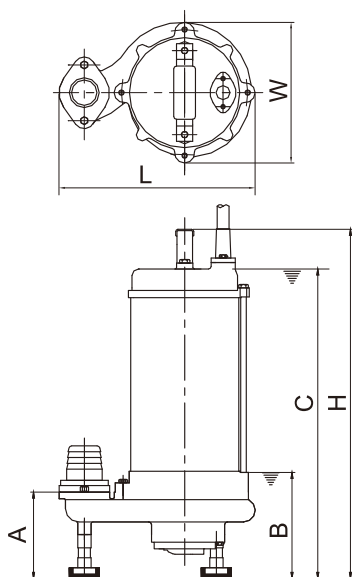

Model	Dimension (mm)						
	Phase	A	B	C	L	W	H
GDE-302	1 ϕ	130	160	500	300	210	560
	3 ϕ			410			470
GDE-303	3 ϕ	130	160	460	300	210	520
GDE-503	3 ϕ	130	160	460	300	210	520
GDE-505	3 ϕ	130	160	490	300	210	550

Selection Table

Model	Connections	Coupling Device Models				
		TSE-50	TME-50(80)	TLE-80(100)	STME-50(80)	STLE-80(100)
		Materials				
		FC200	FC200	FC200	SUS316	SUS316
SDE-03-50	elbow		▲			
SDE-05-50	thread	NOT AVAILABLE				
SDE-05-50	elbow		▲			
SDE-10-50	thread	NOT AVAILABLE				
SDE-10-50	elbow		●			
SDE-20-5(80)	elbow		●			
SDE-30-50(80)	elbow		●			
SDE-50-80(100)	elbow			●		
SDE-75-80(100)	elbow			●		
SVE-03-50	thread/flange	●				
SVE-05-50	thread/flange	●				
SVE-05-50	elbow		▲			
SVE-10-50	thread/flange	●				
SVE-10-50	elbow		▲			
SVE-20-50(80)	elbow		●			
SVE-30-50(80)	elbow		●			
SVE-50-80(100)	elbow			●		
SVE-75-80(100)	elbow			●		
SVNE-05-50	thread/flange	NOT AVAILABLE				
SVNE-05-50	elbow				▲	
SVNE-10-50	thread/flange	NOT AVAILABLE				
SVNE-10-50	elbow				▲	
SVNE-20-50(80)	elbow				●	
SVNE-30-50(80)	elbow				●	
SVNE-50-80(100)	elbow					●
SVNE-75-80(100)	elbow					●
SCE-05-50	thread/flange	●				
SCE-05-50	elbow		▲			
SCE-10-50	thread/flange	●				
SCE-10-50	elbow		▲			
SCE-20-50(80)	elbow		●			
SCE-30-50(80)	elbow		●			
SCE-50-80(100)	elbow			●		
SCE-75-80(100)	elbow			●		
SAE-05-50	thread/flange	●				
SAE-05-50	elbow		▲			
SAE-10-50	thread/flange	●				
SAE-10-50	elbow		▲			
SAE-20-50(80)	elbow		●			
SAE-30-50(80)	elbow		●			
SAE-50-80(100)	elbow			●		
SAE-75-80(100)	elbow			●		



TSE



TME



TLE

TSE Model: Angle type, 2" Discharge


TME Model: Tube type, available 2" or 3" Discharge

TLE Model: Tube type, available 3" or 4" Discharge

▲ PUMPS WITH NON-STANDARD CONNECTIONS. IF TME - Tube Type Coupling Device to be used. Consult EUROFLO.

Installation Type


TSE

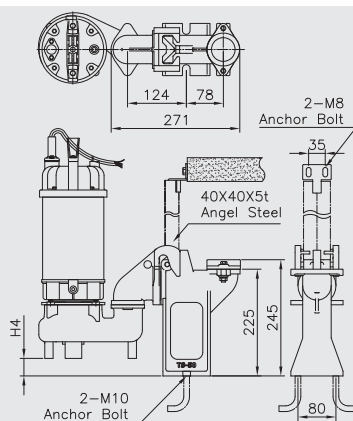

*Without Angel Steel

TSE-50 Coupling Device			
Model	Output		Dimensions
	HP	kW	H4(mm)
SVE-03-50	1/3	0.25	37
SVE-05-50	1/2	0.37	37
SVE-10-50	1	0.75	37
SAE-05-50	1/2	0.37	37
SAE-10-50	1	0.75	37
SCE-05-50	1/2	0.37	75
SCE-10-50	1	0.75	75
HME-05-50	1/2	0.37	65


TME

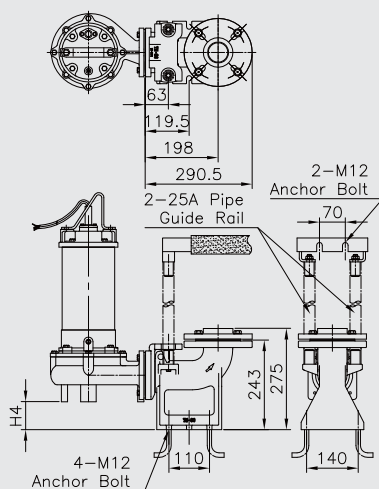

*Without Guide Rail

TME-50(80) Coupling Device			
Model	Output		Dimensions
	HP	kW	H4(mm)
SVE-20-50/80	2	1.5	76
SVE-30-50/80	3	2.2	76
SAE-20-50/80	2	1.5	76
SAE-30-50/80	3	2.2	76
SDE-03-50	1/3	0.25	78
SDE-05-50	1/2	0.37	78
SDE-10-50	1	0.75	78
SDE-20-50/80	2	1.5	65
SNE-30-50/80	3	2.2	65
SCE-20-50/80	2	1.5	60
SCE-30-50/80	3	2.2	60
SNVE-05-50	1/2	0.37	76
SVNE-10-50	1	0.75	76
SNVE-20-50/80	2	1.5	76
SVNE-30-50/80	3	2.2	76

TLE

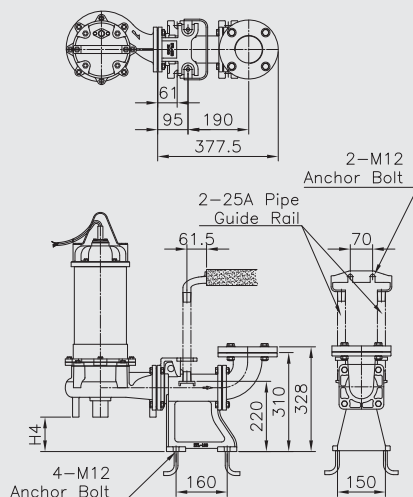

*Without Guide Rail

TLE-80(100) Coupling Device			
Model	Output		Dimensions
	HP	kW	H4(mm)
SVE-50-80/100	5	3.7	110
SVE-75-80/100	7.5	5.5	110
SAE-50-80/100	5	3.7	110
SAE-75-80/100	7.5	5.5	110
SDE-50-80/100	5	3.7	113
SDE-75-80/100	7.5	5.5	113
SCE-50-80/100	5	3.7	108
SCE-75-80/100	7.5	5.5	108
SVNE-50-80/100	5	3.7	108
SNVE-75-80/100	7.5	5.5	108

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Your Local Distributor Details :



Euroflo Pumps International Pte Ltd

No.1 Joo Koon Way Singapore 628942 Tel: +65 6861 3836 Fax: +65 6861 3936

71006/1808Rev03.1