




AQUAFOS Pressure Tanks
10 Bar Pressure Tank
(Non-NSF)

NSPTB ,NSPTT ,NSPTN series



Pressure Tank

Model code

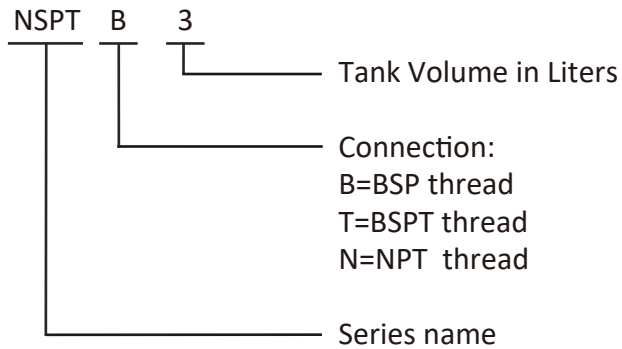

Features

- Polypropylene liner to ensure long durability
- EPDM diaphragm to assure long life and safety
- Corrosion resistant durable baked epoxy coating finish
- Leak free, O-ring sealed air valve cap
- 100% pressure tested
- No maintenance needed
- 304 Stainless Steel water connection
- CE approved

Applications

- Water storage
- Water pressure boosting
- Water transferring

Operation Conditions

- Max.Working Pressure: 10 bar
- Max.Working Temperature: 90°C




In-Line Type




Vertical Type With Base


Volume	Type
1 - 38 Liter	In-Line
58 - 450 Liter	Vertical Type With Base

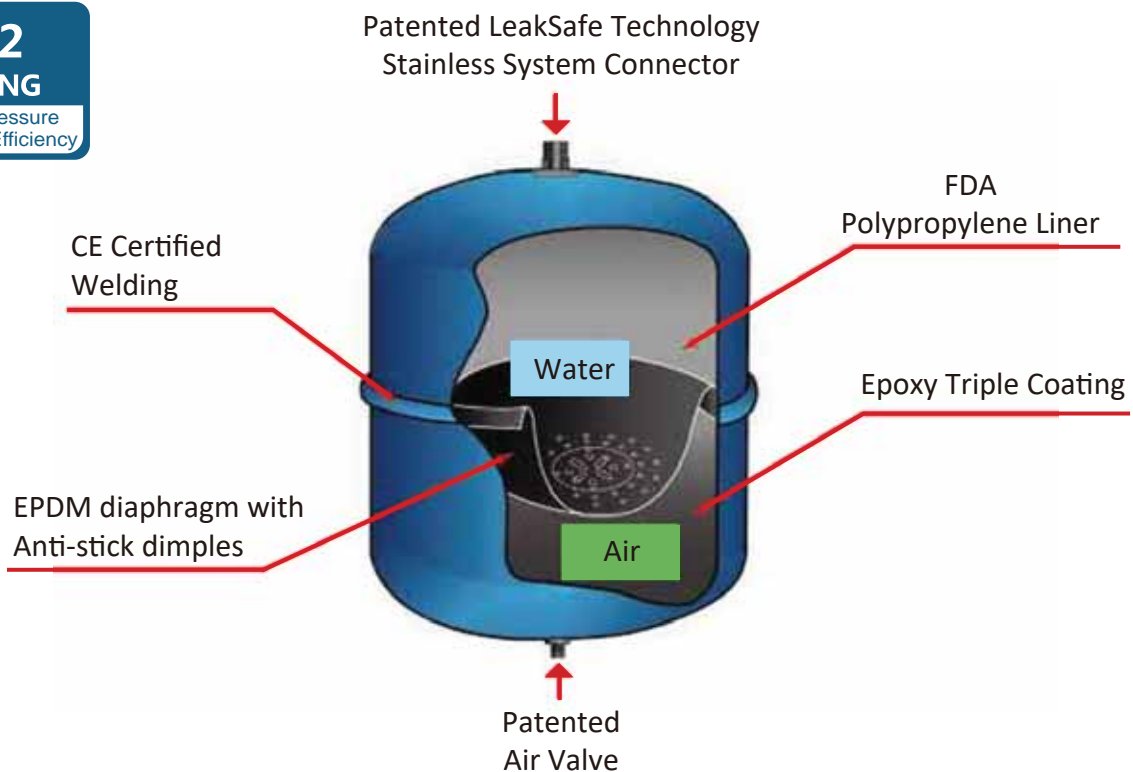

Pressure Tank

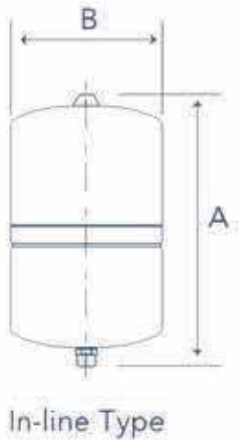

Model	Dimensions(mm)			
	A		B	
	mm	Inch	mm	Inch
NSPT 1	201	7.9	120	4.7
NSPT 3	220	8.7	140	5.5
NSPT 8	304	12.0	203	8.0
NSPT 12	384	15.1	229	9.0
NSPT 18	364	14.3	280	11.0
NSPT 24	415	16.3	290	11.4
NSPT 38	564	22.2	290	11.4

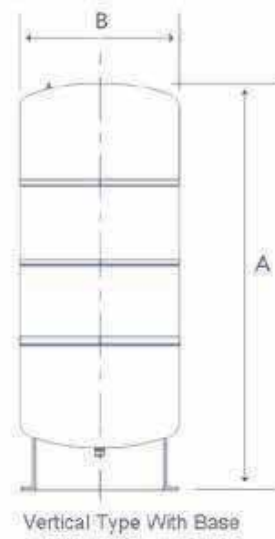

Model	Dimensions(mm)			
	A		B	
	mm	Inch	mm	Inch
NSPT 58	592	23.4	390	15.3
NSPT 80	770	30.3	390	15.3
NSPT 100	765	30.1	430	16.9
NSPT 120	1148	45.2	390	15.3
NSPT 130	931	36.7	550	21.7
NSPT 160	1066	42.0	550	21.7
NSPT 200	1196	47.1	550	21.7
NSPT 235	1463	57.6	550	21.7
NSPT 305	931	36.7	550	21.7
NSPT 325	1105	45.5	650	25.6
NSPT 450	1410	55.5	650	25.6

Model			Total Tank Volume		Accept Volume		N.W.		G.W		Shipping Volume		Connection	Base
			Liter	Gal	Liter	Gal	Kg	Lbs.	Kg	Lbs.	CUF	CBM		
In-line Type														
BSP	BSPT	NPT	Liter	Gal	Liter	Gal	Kg	Lbs.	Kg	Lbs.	CUF	CBM	Dimensions	Material
N/A	N/A	NSPTN 1	1.3	0.35	0.4	0.11	2.7	5.96	3.1	6.84	0.84	0.0238	1/2" (MALE)	-
NSPTB 3	NSPTT 3	NSPTN 3	3	0.5	1.0	0.25	4.1	9.04	4.7	10.4	0.84	0.0238	3/4"or 1" (MALE)	-
NSPTB 8	NSPTT 8	NSPTN 8	8	2.0	3.5	0.9	1.9	4.19	2.3	5.07	0.52	0.0147	3/4"or 1" (MALE)	-
NSPTB 12	NSPTT 12	NSPTN 12	12	3.2	6.0	1.6	2.9	6.40	3.2	7.06	0.77	0.0218	3/4"or 1" (MALE)	-
NSPTB 18	NSPTT 18	NSPTN 18	18	4.5	9.5	2.5	3.3	7.28	3.7	8.16	1.13	0.0320	3/4"or 1" (MALE)	-
NSPTB 24	NSPTT 24	NSPTN 24	24	6.0	11.5	3.0	3.9	8.60	4.8	10.6	1.51	0.0428	3/4"or 1" (MALE)	-
NSPTB 38	NSPTT 38	NSPTN 38	38	10	20.0	5.2	5.9	13.0	6.8	15.0	1.94	0.0549	3/4"or 1" (MALE)	-
Vertical Type With Base														
NSPTB 58	NSPTT 58	NSPTN 58	58	14	42.8	11.3	9.7	21.4	11.0	24.3	3.68	0.1042	3/4"or 1" (MALE)	PLASTIC
NSPTB 80	NSPTT 80	NSPTN 80	80	20	50.0	13.0	13.1	28.9	14.6	32.2	4.81	0.1362	3/4"or 1" (MALE)	PLASTIC
NSPTB 100	NSPTT 100	NSPTN 100	100	28	58.5	15.0	13.3	29.3	15.2	33.5	5.39	0.1526	1" (MALE)	PLASTIC
NSPTB 120	NSPTT 120	NSPTN 120	120	32	58.8	15.0	20.1	44.3	22.7	50.1	6.77	0.1917	1" (MALE)	PLASTIC
NSPTB 130	NSPTT 130	NSPTN 130	130	34	85.6	22.5	21.5	47.4	24.5	54.1	8.42	0.2384	1" -1/4"(MALE)	PLASTIC
NSPTB 160	NSPTT 160	NSPTN 160	160	44	115	30.0	24.5	54.0	27.8	61.3	10.19	0.2885	1" -1/4"(MALE)	PLASTIC
NSPTB 200	NSPTT 200	NSPTN 200	200	53	128	33.8	27.6	60.0	31.1	68.6	12.01	0.3401	1" -1/4"(MALE)	PLASTIC
NSPTB 235	NSPTT 235	NSPTN 235	235	62	140	35.2	34.9	77.0	37.7	83.2	13.07	0.3701	1" -1/4"(MALE)	PLASTIC
NSPTB 305	NSPTT 305	NSPTN 305	305	81	167	44.0	41.1	90.7	47.1	103.9	16.28	0.4610	1" -1/4"(MALE)	PLASTIC
NSPTB 325	NSPTT 325	NSPTN 325	325	86	228	60.2	42.5	93.7	48.5	106.9	17.51	0.4958	1" -1/4"(MALE)	STEEL
NSPTB 450	NSPTT 450	NSPTN 450	450	120	360	95.1	56.5	124.6	61.5	135.6	24.20	0.6853	1" -1/4"(MALE)	STEEL

SPT 1 and 3 liters tanks: 4 pcs / box

Optional Stainless steel 90°female elbow (58, 80, 100, 120, 130, 160, 200, 235, 305, 325, 450 Liters vertical models)

Factory Precharge:30 PSI / 2bar

Optional New Plastic base (Vertical Models, 58, 80, 100, 120L)

Your local distributor details:



Euroflo Pumps International Pte Ltd

No.1 Joo Koon Way Singapore 628942 Tel: +65 6861 3836 Fax: +65 6861 3936

T0206/210600